



MODEL
67 KW/67 kVA
Stand-by Power @ 60 Hz

JS70UM
61 kW / 61 kVA
Prime Power @ 60 Hz

Standard Features

- Engine (JOHN DEERE , 4045TF120)
- Charge alternator 12 V, Governor: Meca/Mechanical
- Alternator (LEROY SOMER , LSA442VS45)
- Single bearing alternator IP 23 , insulation class H /H
- Radiator 50°C [122°F]°C max. T°air inlet with cool ant cap
- Skid and vibration isolators
- Dry type air filter
- Microprocessor control panel
- Main line circuit breaker
- 12 V battery, rack and cable
- Industrial silencer (loose)
- User manual
CSA Certified (consult us)



Generator ratings

Voltage	HZ	Phase	PF	Stand by Amps	Stand by power kW/kVA	Prime power kW/kVA
240MONO V	60 Hz	1	1	279	67 / 67	61 / 61

Stand-By ratings are available for the duration of any power outage. No overload capacity is specified at this ratings. Prime ratings are available per BS 5514, DIN 6271, ISO-3046 and IEC 34-1 with 10% overload capacity one hour in twelve hours.

Conditions of sales

- SDMO provides a full line of products with high quality recognized engines and alternators.
- Service and parts are available from SDMO distributors as a single source of responsibility.
- Each and every units is factory tested. All generator sets are also prototype tested.
- Two years limited warranty , please refer to the conditions terms . Five years extended are also available.



specifications and design liable to modifications without prior notice

ENGINE DATA

Manufacturer / Model	4045TF120 , 4-cycle, Turbo , N/A
Cylinder Arrangement	4 X L
Displacement	4.48L [273.4C.I.]
Bore and Stroke	106mm [4.2in.] X 127mm [5.0in.]
Compression ratio	17 : 1
Rated RPM	1800 Rpm
Piston Speed	7.62m/s [25.0ft./s]
Max. stand by Power at rated RPM	79kW [106BHP]
Frequency regulation, steady state	+/- 2. 5%
BMEP	11bar [159psi]
Governor : type	Meca/Mechanical

Exhaust System

Exhaust gas flow	220L/s [466cfm]
Exhaust temperature	520°C [968°F]
Max back pressure	750mm CE [30in. WG]

Fuel System

110% (Stand By power)	20.5L/h [5.4gal/hr]
100% (of the Prime Power)	19L/h [5.0gal/hr]
75% (of the Prime Power)	14.5L/h [3.8gal/hr]
50% (of the Prime Power)	10.5L/h [2.8gal/hr]
Total fuel flow	112L/h [29.6gal/hr]

Oil System

Total oil capacity w/filters	13.5L [3.6gal]
Oil Pressure low idle	1bar [14.5psi]
Oil Pressure rated RPM	5bar [72.5psi]
Oil consumption 100% load	0.02L/h [0.0gal/hr]
Oil capacity carter	12.5L [3.3gal]

Thermal balance 100% load

Heat rejection to exhaust	63kW [3582Btu/mn]
Radiated heat to ambient	9kW [512Btu/mn]
Heat rejection to coolant	39kW [2218Btu/mn]

Air intake

Max. intake restriction	625mm CE [25in. WG]
Engine air flow	88L/s [186cfm]

Coolant System

Radiator & engine capacity	23.6L [6.2gal]
Max water temperature	105°C [221°F]
Outlet water temperature	93°C [199°F]
Fan power	3 kW
Fan air flow	N/A
Available restriction on air flow	20mm CE [0.8in. WG]
Type of coolant	Gencool
Thermostat	82-94 °C

Emissions

HC	N/A
CO	N/A
Nox	N/A
PM	N/A



JS70UM
specifications and design liable to modifications without prior notice

ALTERNATOR SPECIFICATIONS

GENERAL DATA

- Compliance with NEMA MG21, UTE NF C51.111, VDE 0530, BS 4999, CSA standards.
- Vacuum-impregnated windings with epoxy varnish.
- IP21 drip proof.

ALTERNATOR DATA

Manufacturer / Type	LERROY SOMER LSA442VS45
Number of phase	3
Power factor (Cos Phi)	0.8
Altitude	< 1000 m
Overspeed	2250 rpm
Pole : number	4
Exciter type	Shunt
Insulation : class, temperature rise	H / H
Voltage regulator	R230
Sustained short circuit current	-
Total harmonics (TGH/THC)	< 4%
Wave form : NEMA = TIF – TGH/THC	< 50
Wave form : CEI = FHT – TGH/THC	< 2%
Bearing : number	1
Coupling	Direct
Voltage regulation 0 to 100% load	+/- 1%
Recovery time (20% Volt dip) ms	500 ms
SkVA with 90 % of nominal sustained voltage (at 0.4 PF)	N/A

OTHER ALTERNATOR DATA

Continuous nominal rating @ 40°C	123 kVA
Standby rating @ 27°C	144 kVA
Efficiencies @ 4/4 load	91 %
Air flow	0.44m ³ /s [932.30cfm]
Short circuit ratio (Kcc)	0.33
Direct axis synchro reactance unsaturated (Xd)	377 %
Quadra axis synchro reactance unsaturated (Xq)	226 %
Open circuit time constant (T'do)	2555 ms
Direct axis transient reactance saturated (X'd)	14.7 %
Short circuit transient time constant (T'd)	100 ms
Direct axis subtransient reactance saturated (X''d)	8.8 %
Subtransient time constant (T''d)	10 ms
Quadra axis subtransient reactance saturated (X''q)	10.8 %
Zero sequence reactance unsaturated (Xo)	1 %
Negative sequence reactance saturated (X2)	9.9 %
Armature time constant (Ta)	15 ms
No load excitation current (io)	0.5 A
Full load excitation current (ic)	2.1 A
Full load excitation voltage (uc)	39 V
Recovery time (Delta U = 20% transitoire)	500 ms
Motor start (Delta = 20% perm. Or 50% trans.)	330 kVA
Transient dip (4/4 charge) – PF : 1.8 AR	17.6 %
No load losses	2.72 kW
Heat rejection	10 kW



Control Panels

Standard panel : NEXYS



Specifications :

Frequency meter, Ammeter, Voltmeter

Alarms and faults Oil pressure, water temperature, Overcrank, Overspeed, Min/max alternator, Low fuel level, Emergency stop

Engine parameters :

Hours counter, Engine speed, Battery voltage, Fuel level, Air preheating

Optional panel : TELYS



Specifications :

Frequency meter, Ammeter, Voltmeter

Alarms and faults :

Oil pressure, water temperature, No start-up, Overspeed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop

Engine parameters :

Hours counter, Oil pressure, Water temperature, Engine speed, Battery voltage, Fuel level



JS70UM
specifications and design liable to modifications without prior notice

Options

<p>Engine and Radiator</p> <ul style="list-style-type: none"> ▪ Heat shield protection ▪ Oil drain extension ▪ Heavy duty air filter ▪ Lube oil drain pump ▪ Radiator core guard ▪ Battery charger ▪ Block heater 	<p>Alternator</p> <ul style="list-style-type: none"> ▪ Anti condensation heater ▪ Enforced impregnation ▪ Oversized alternator <p>Exhaust</p> <ul style="list-style-type: none"> ▪ Residential silencer ▪ Critical silencer ▪ Flexible exhaust conn. 	<p>Control panel</p> <ul style="list-style-type: none"> ▪ NFPA 110 level 1 ▪ Paralleling system ▪ Remote annunciator ▪ Oil temperature shutdown ▪ Key start panel
<p>Fuel</p> <ul style="list-style-type: none"> ▪ Day tank ▪ Subbase fuel tanks UL ▪ Water separator fuel filter 	<p>Enclosure M129</p> <ul style="list-style-type: none"> ▪ Silent 74 db @ 23 Ft (stby) 	<p>Literature</p> <ul style="list-style-type: none"> ▪ Parts ▪ Maintenance

Weight and Dimensions


Open Model



Overall size l x w x h :
1870mm [74in] x 994mm [39in] x 1360mm [54in]


Weight :
1150kg [2535lbs] Net 1180kg [2601lbs] Brut

With Optional Enclosure

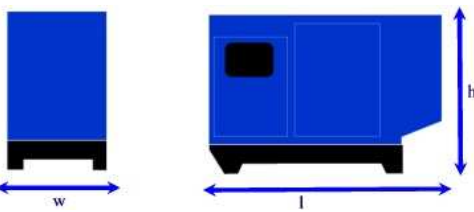

Overall size l x w x h :
2554mm [101in] x 1170mm [46in] x 1680mm [66in]

Weight :
1550kg [3416lbs] Net 1580kg [3482lbs] Brut



SDMO industries - Head Office – 12bis, rue de la Villeneuve – CS 92848 - 29228 BREST cedex 2 -
FRANCE www.sdmo.com



JS70UM
specifications and design liable to modifications without prior notice